


PSI Series 124


Submersible Miniature Connectors

PSI Series 124 miniature connectors are fabricated with amber or black polyurethane. The Series 124 is fully compatible with our 155 Series bulkhead mount connector. The Series 124 is available in male or female form with six or seven contacts. The standard Series 124 in-line connector is molded to a twelve-inch pigtail using 24 AWG PVC coated stranded wire with a polyurethane outer jacket. For special orders, wire size may vary from 22 AWG to 28 AWG with any polyurethane compatible jacket. PSI Series 124 male or female dummy plugs are also available.

Series 124 Female In-line Connector

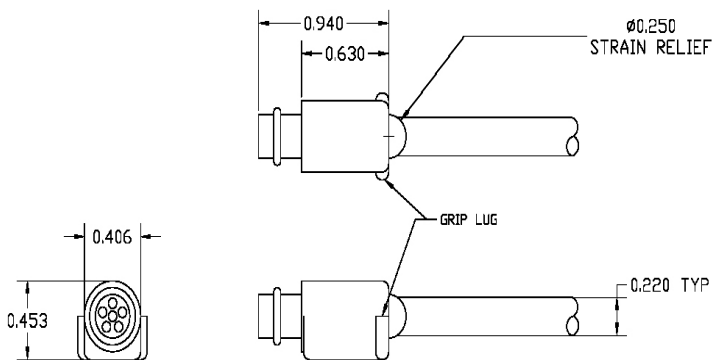


Series 124 Male In-line Connector

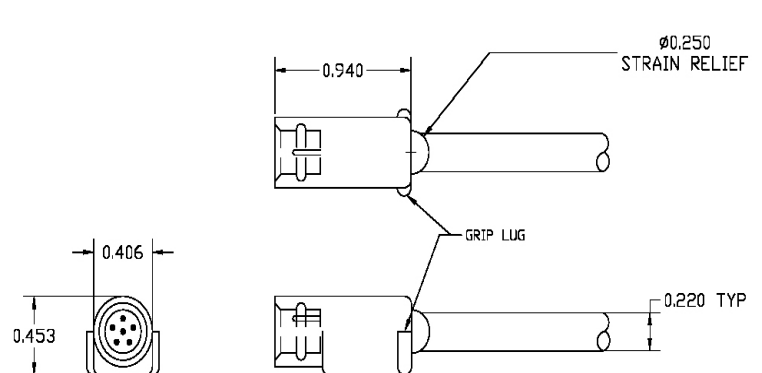

Material	Polyurethane
Operating Pressure (max)	10,000 psi (full ocean depth)
Operating Temperature	-40°F to +150°F
Electrical (per conductor)	600 V, 1 A

Ordering Information

P/N: 124-()-()-()-()

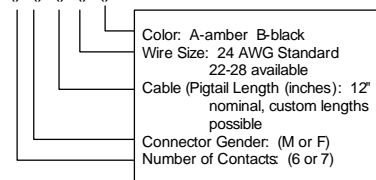

For more information or ordering contact:
 Paul Skaggs, Planning Systems Incorporated
 21294 Johnson Road, Long Beach Industrial Park
 Long Beach, MS 39560-9702
 Sales@psilongbeach.com
 Tel. (228) 863-0007 ext 102, Fax: (228) 863-0281